

# AL126

## Compact High Brightness Bar Light



- 4i) High intensity light in a small package - only 20mm (.79") wide.
- 4i) Convenient M4 nut channel for mounting


### Ordering Information

Standard Product:  
Shipped Next Day

**AL126-WHIC**


Configured with inline  
Current Source

Standard Product Variation:  
Shipped Within Two Weeks

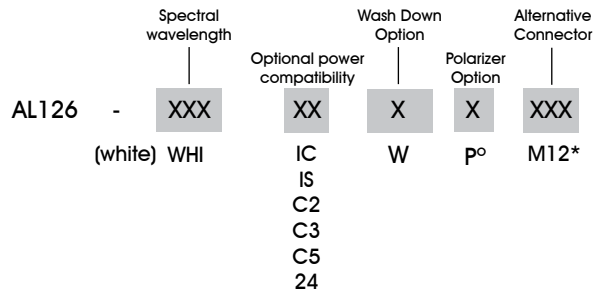

- IC = ICS (requires 24v power supply)
- IS = ISU (requires 24v power supply)
- C2 = Ai Connector
- C5 = Pulsar 320 Connector
- \* Available with IC and 24v options only
- o Not available in combination with the Wash Down Option

### Dimensional Information

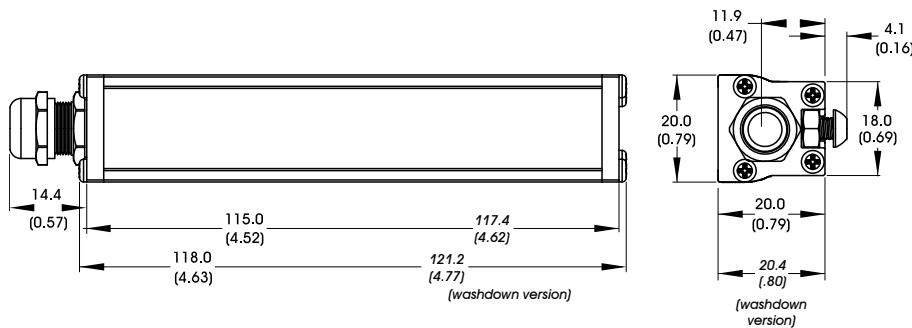

[Click for Installation Models & Drawings](#)

Cable Length: 1.5M (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Current Requirements



### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C