

EL126

Expandable, Compact High Brightness Bar Light



- 4i** High intensity light in a small package - only 20.1 mm (.79") wide
- 4i** Expandable in 50mm (2") increments up to 1029.2mm (40")

Ordering Information

Standard Product Variation:
Shipped Within Two Weeks

EL126 XX - XXX XX X X XXX

Lighted Length Spectral wavelength Optional power compatibility Wash Down Option Polarizer Option Alternative Connector

2" increments up to 40" (white) WHI IC W p^o M12*

IS* C2* C3 C5 24

IC = ICS (requires 24v power supply)
IS = ISU (requires 24v power supply)
C2 = Ai Connector
C5 = Pulsar 320 Connector


- Not available with all lengths
- * Available with IC and 24v options only
- o Not available in combination with the Wash Down Option

EL126 Unsealed	
PART NUMBER	LENGTH IN MM
EL12602	64.0 (2.52)
AL126*	114.8 (4.52)
EL12606	165.6 (6.52)
EL12608	216.4 (8.52)
EL12610	267.2 (10.52)
EL12612	318.0 (12.52)
EL12614	368.8 (14.52)
EL12616	419.6 (16.52)
UP TO EL12640	1029.2 (40.52)

*see AL126 Spec Sheet

Built-to-order lights are non-returnable.

Dimensional Information

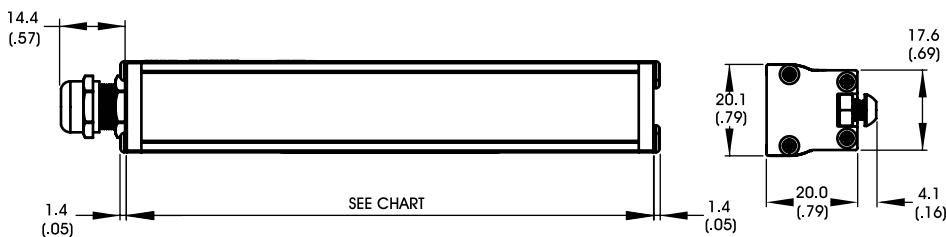

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)


EL126 with Washdown	
PART NUMBER	LENGTH IN MM
EL12602	66.6 (2.62)
AL126*	117.4 (4.62)
EL12606	168.2 (6.62)
EL12608	219.0 (8.62)
EL12610	269.8 (10.62)
EL12612	320.6 (12.62)
EL12614	371.35 (14.62)
EL12616	422.2 (16.62)
UP TO EL12640	1031.8 (40.62)

*see AL126 Spec Sheet

[Click for Installation Models & Drawings](#)

Current Requirements

Maximum draw per each 50mm (2") segment

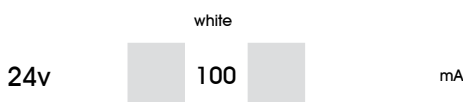

Standard Product Information

Product Lifetime: 50,000 hours

Operating Temperature: 0-60° C