

LL068

High Intensity Line Light

- 4ii** New LEDs 2x brighter than earlier models
- 4ii** Perfect for line scanning applications.
160,000 Lux @ 3"; 50,000 hours life
- 4ii** Modular design in 6" increments up to 96"



Ordering Information

Standard Product:
Shipped Within Three Weeks

LL068-WHI24

Configured for use with user
supplied 24v power supply.

Standard Product Variation:
Shipped Within Three Weeks

	Lens Type †	Spectral wavelength	Optional power compatibility	Alternative Connector	Product Identifier
LL068 -	X	XXX	XX	XXX	XXX
	F	(blue) 470 (green) 520 (amber) 590 (red) 625 (infra-red) 850 (white) WHI	IC ^δ IS ^Δ C3 24	M12*	###

Individually assigned based on:
length, LED color and lens.
Please call for part number and pricing.

IC = iCS (requires 24v power supply)

^δ Up to 12" lights only

IS = iSU (requires 24v power supply)

^Δ 590, 625 & 850: 12 LEDs maximum;
470, 530 & WHI: 18 LEDs maximum


C3 = Pulsar 710 Connector

* Available with IC and 24v options only

† Leave blank for Standard, "E" Lens

Built-to-order lights are non-returnable.

Dimensional Information

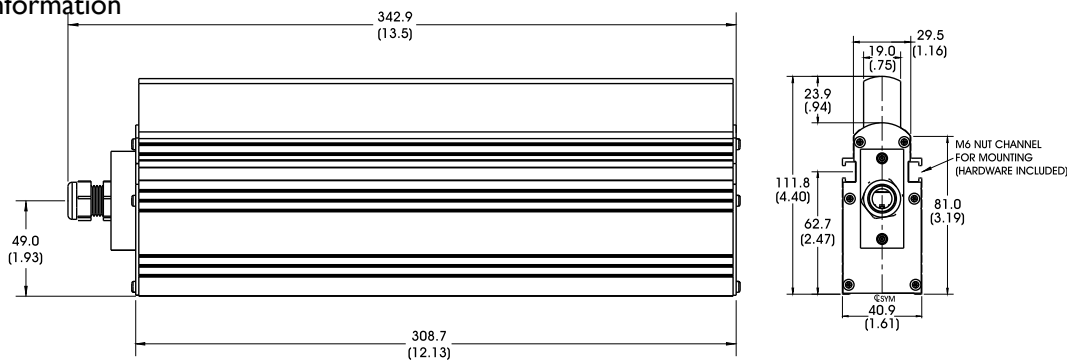

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

Maximum draw per 152mm (6") length

	blue	green	amber	red	infra-red	white	
@12	N/A	N/A	1400	1400	1400	N/A	mA
@24	700	700	700	700	700	1000	mA

Standard Product Information

Product Lifetime: 50,000 hours

Operating Temperature: 0-60° C