

# SL4301

## Single LED Spot Light



- Ai** Designed to replace fiber optics in microscopes and microscopic applications
- Ai** Standard or 5v versions available

### Ordering Information


Standard Product:  
Shipped Next Day

Standard Product Variation:  
Shipped Within Two Weeks

**SL4301-660**

Configured for use with Ai


SL4301	Optional Mounting X	-	Spectral wavelength XXX	Optional Power Compatibility X	Alternative Connector XXX
	B		(UV) 395 <sup>◇</sup> (blue) 470 (green) 520 (yellow) 590 (orange) 625 (red) 660 (infra-red) 880 (white) WHI	5	M12*

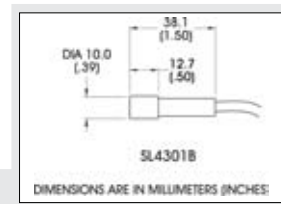

\* Available with 5v option only

◇ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

### Dimensional Information

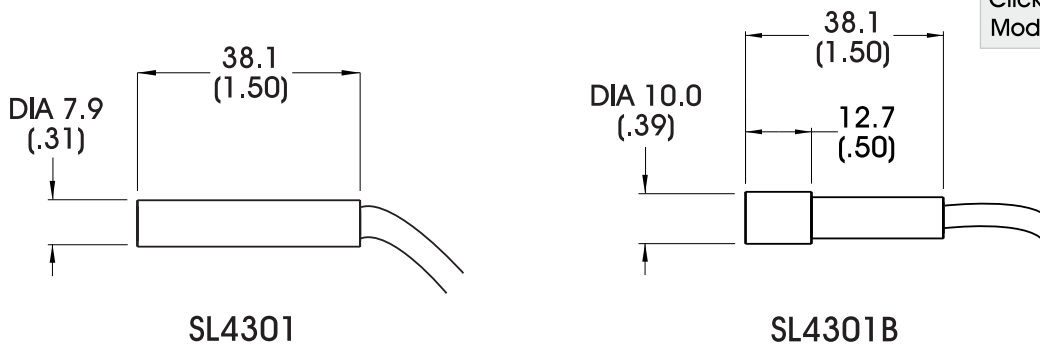

[Click for Installation Models & Drawings](#)

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	
@5	20	20	20	20	30	30	20	mA

### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C