

SL6404

High Current LED Spot Light



- 4i)** High intensity illumination from a long distance.
- 4i)** Available with built in strobe or wash down options.

Ordering Information

Standard Product:
Shipped Next Day

SL6404-WHI24

Configured for use with user supplied 24v regulated power supply.

Standard Product Variation:
Shipped Within Two Weeks


	Spectral wavelength	Power Option	Wash Down	Alternative Connector
SL6404 -	XXX	XX	X	XXX
	(blue) 470	IC	W	M12*
	(green) 530	C2		
	(amber) 590	C3		
	(red) 625	C5		
	infrared 850	12		
	(white) WHI	24		
		IS [§]		

IC = iCS (requires 24v power supply)
 C2 = Ai Connector
 C3 = Pulsar 710 Connector
 C5 = Pulsar 320 Connector
 * Available with IC and 24v options only
 IS = Internal Strobe

§Internal Strobe:

Pulse width: 10-200µSec
 Trigger input: 3-24v rising edge,
 CMOS/TTL compatible 30Hz maximum

Dimensional Information

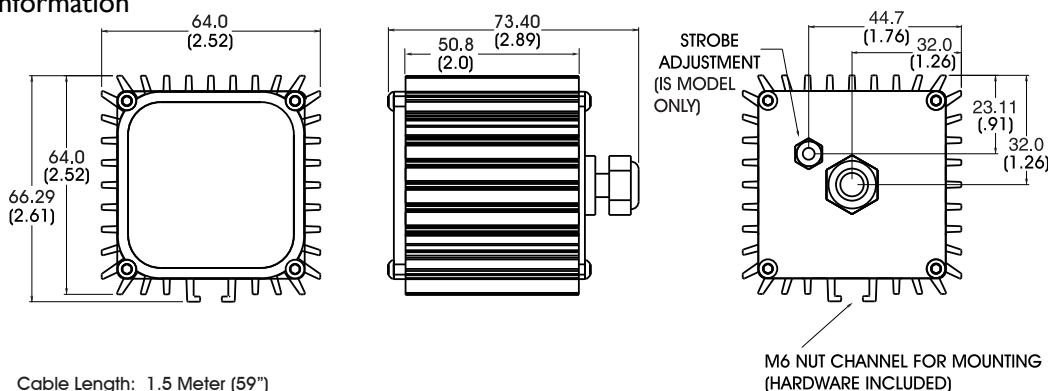

[Click for Installation Models & Drawings](#)

Cable Length: 1.5 Meter (59")

Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@12	700	700	700	700	700	700	mA
@24	350	350	350	350	350	350	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C